




## HBBQ-00-240X240-X-R-24V

### Lighting Dimension

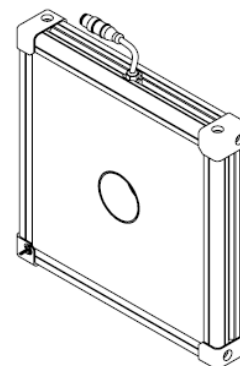

PIN 1	BROWN	24V
PIN 2	WHITE	-
PIN 3	BLUE	GND
PIN 4	BLACK	-
PIN 5	GRAY	-

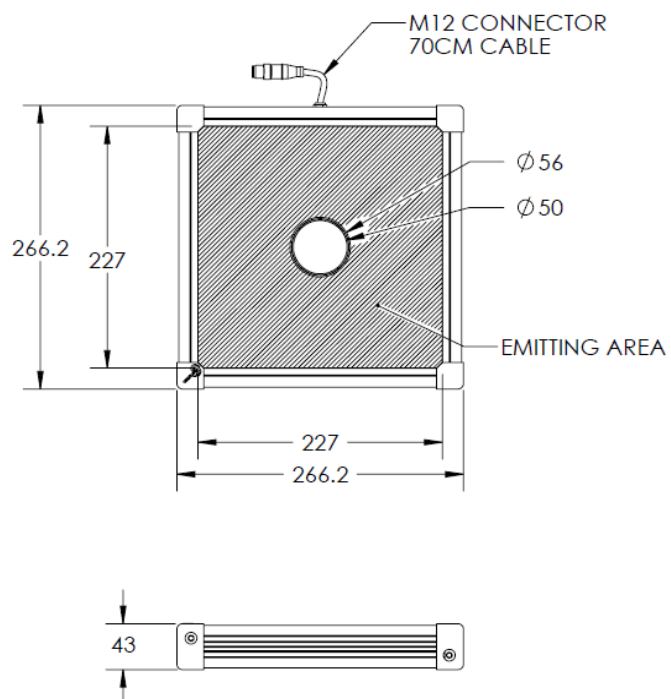




Mechanical Information	
Casing Material	Aluminium
Storage & Operating Temperature Range	Temp 0-60°C, Humidity 20-85%
Weight	1970 g
Length / Outer Diameter	266.2 X 266.2 mm
Width / Inner Diameter	50 mm
Thickness / Height	43 mm



## HBBQ-00-240X240-X-R-24V

Optical Information				
Part Number		HBBQ-00-240X240-X-R-24V		
LED Colour		RED		
Wavelength	(nm)	630		
Intensity ( ±15%)	(Lux)	2340	1957	1540
Working Distance	(mm)	200	220	250
Illumination (number of rows)		X		
Illumination Active Area				
Active Length / Outer diameter	(mm)	227 X 227		
Active Width / Inner diameter	(mm)	56		
Emission Angle	(deg.)	0		
Eye Safety Class ( IEC62471)		EXEMPT		
Electrical Information				
Lighting Supply Voltage (constant voltage mode)		24V ± 2%		
Continuous Current	(mA)	1080		
Power Consumption	(W)	25.92		
Lighting Casing Temperature, Operating after 60 minutes	°C	58.7		
Strobe Mode Specification				
Pulse Operation		YES		
Max. Lighting Supply Voltage (constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle Recommended at 36VDC		
Pulse Current, (Max. 10 msec) (constant current power supply)	(mA)	3240		
Max. Trigger Pulse Duration	(msec)	10		
Duty Cycle		0-10%		
Additional Information				
Additional Cooling Method		Attached to machine part for better heat dissipation		
Intensity Controller Selection		SD/SDA-Series		
CE Conformity		YES		
RoHS Compliance		YES		
Connection				
Connector Type (default)		M12 5 PIN CONNECTOR (MALE)		
Cable Length (out from lighting)	( mm )	700		
Pin Configuration		Pin	Signal	Cable Colour
		1	24V	BROWN
		2	-	WHITE
		3	GND	BLUE
		4	-	BLACK
		5	-	GRAY
Extension Cable				
Connector Type (default)		M12 5 PIN CONNECTOR (FEMALE)		
Part Number		EXT-FL-M12F-3M-24V		
Cable Length (out from female connector)	(mm)	3000		
Extension Cable (connect to M12 5 Pin Male Connector from lighting)				
Application				
Illumination Type		Diffused Illumination		
Application Use		Robotic picking, inspection for parts identification & missing parts, visual inspection for large workpiece, measuring stamp dimensions for press products		

## HBBQ-00-240X240-X-R-24V

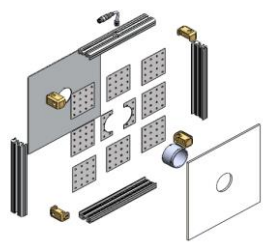Advantages			
PCBA Cascade			
Easy Mounting	Join Bracket (Angle Mount) 	L Bracket (Vertical Mount) 	L-shaped Plate (Horizontal Mount) 