


BHD2-00-545X545-1-R-24V

Lighting Dimension



Mechanical Information	
Casing Material	Aluminium
Storage & Operating Temperature Range	Temp 0-60°C, Humidity 20-85%
Weight	4800 g
Length / Outer Diameter	607.4 mm
Width / Inner Diameter	607.4 mm
Thickness / Height	11.8 mm

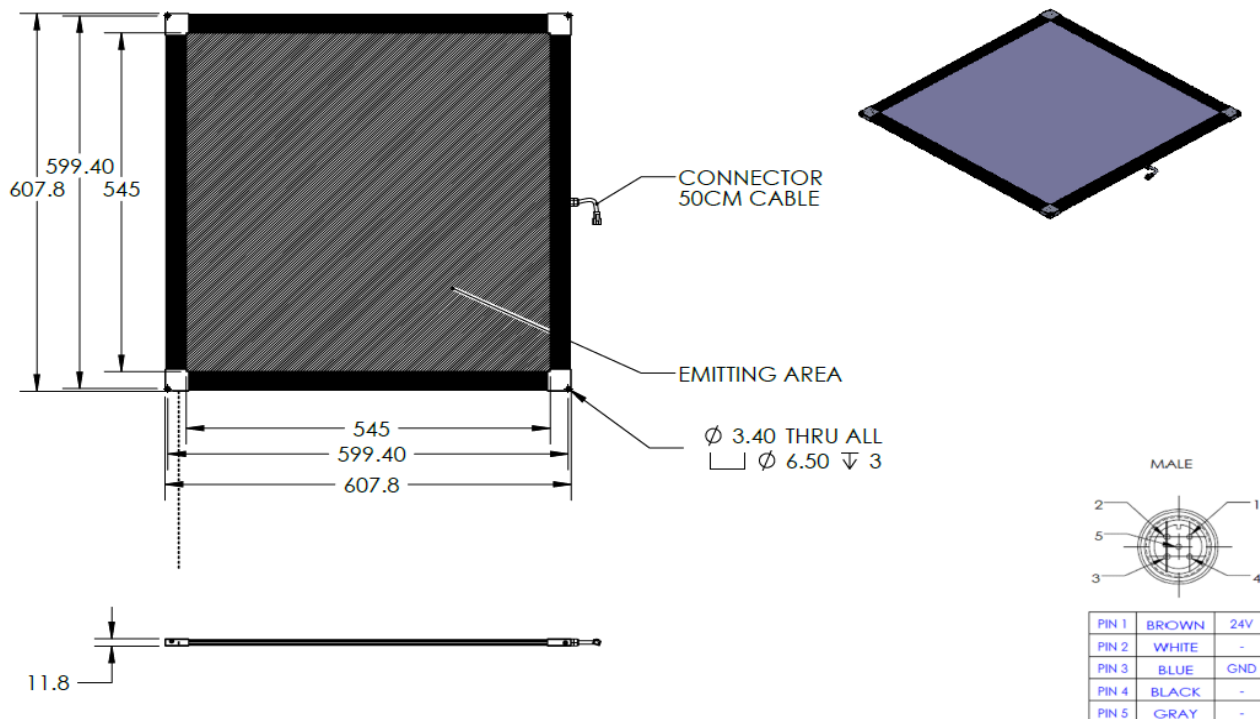


BHD2-00-545X545-1-R-24V

Optical Information				
Part Number		BHD2-00-545X545-1-R-24V		
LED Colour		RED		
Wavelength	(nm)	630		
Intensity (±15%)	(Lux)	2683.8	2343	2201
Working Distance	(mm)	5	30	15
Illumination (number of rows)		1		
Illumination Active Area				
Active Length	(mm)	545		
Active Width	(mm)	545		
Emission Angle	(deg.)	0		
Eye Safety Class (IEC62471)		EXEMPT		
Electrical Information				
Lighting Supply Voltage (constant voltage mode)		24V ± 2%		
Continuous Current	(mA)	1440		
Power Consumption	(W)	34.56		
Lighting Casing Temperature, Operating after 60 minutes	°C	36.6		
Strobe Mode Specification				
Pulse Operation		YES		
Max. Lighting Supply Voltage (constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle Recommended at 36VDC		
Pulse Current, (Max. 10 msec) (constant current power supply)	(mA)	4320		
Max. Trigger Pulse Duration	(msec)	10		
Duty Cycle		0-10%		
Additional Information				
Additional Cooling Method		Attached to machine part for better heat dissipation		
Intensity Controller Selection		SD/SDA-Series		
CE Conformity		YES		
RoHS Compliance		YES		
Connection				
Connector Type (default)		M12 5 PIN CONNECTOR (MALE)		
Cable Length (out from lighting)	(mm)	500		
Pin Configuration		Pin	Signal	Cable Colour
		1	24V	BROWN
		2	-	WHITE
		3	GND	BLUE
		4	-	BLACK
		5	-	GRAY
Extension Cable				
Connector Type (default)		M12 5 PIN CONNECTOR (FEMALE)		
Part Number		EXT-FL-M12F-3M-24V		
Cable Length (out from female connector)	(mm)	3000		
Extension Cable (connect to M12 5 Pin Male Connector from lighting)				
Application				
Illumination Type		Backlight Illumination		
Application Use		Lead frame inspection, shape recognition, size measurement		



BHD2-00-545X545-1-R-24V

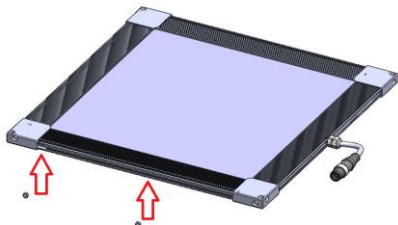Advantages	
Easy Mounting	 A 3D perspective diagram of the BHD2-00-545X545-1-R-24V LED panel. The panel is square with a light blue translucent center and a black frame. It is shown from a slightly elevated angle. Two red arrows point upwards from the bottom edge of the panel, indicating the location of the mounting clips. A small cable with a connector is visible on the right side of the panel.