









HBBX-00-160X240-X-W-24V

Lighting Dimension

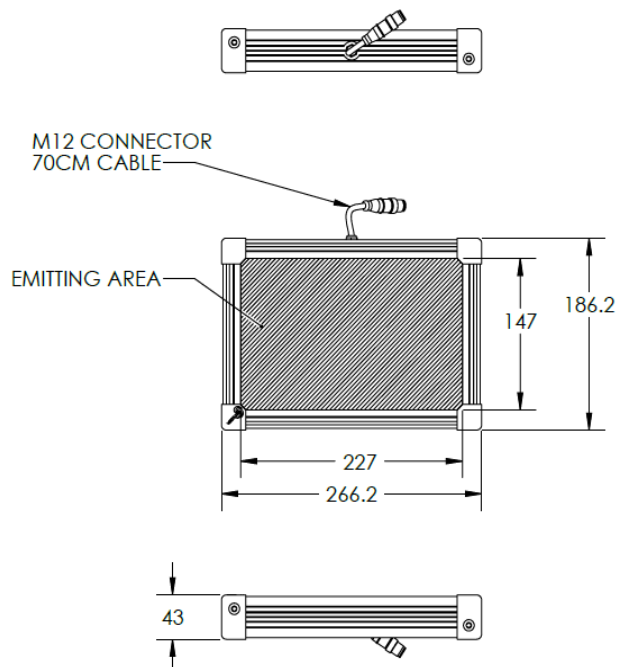

Mechanical Information	
Casing Material	Aluminium
Storage & Operating Temperature Range	Temp 0-60°C, Humidity 20-85%
Weight	1500 g
Length / Outer Diameter	266.2 mm
Width / Inner Diameter	186.2 mm
Thickness / Height	43 mm

HBBX-00-160X240-X-W-24V

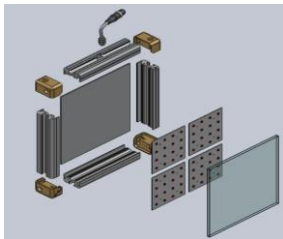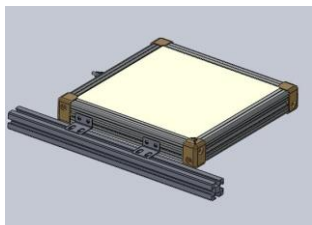Advantages	
PCBA Cascade	
Easy Mounting	Join Bracket (Angle Mount) 
	L Bracket (Vertical Mount) 
	L-shaped Plate (Horizontal Mount) 

Uniform Graph (Relative Irradiation Strength) - Representative pattern

COLOUR	TOLERANCE	L X W
Red	± 5 %	75 X 72
Orange	± 10 %	102 X 99
Yellow	± 15 %	127 X 120
Green	± 20 %	137 X 133
Blue	± 25 %	142 X 140
Purple	± 30 %	145 X 145

