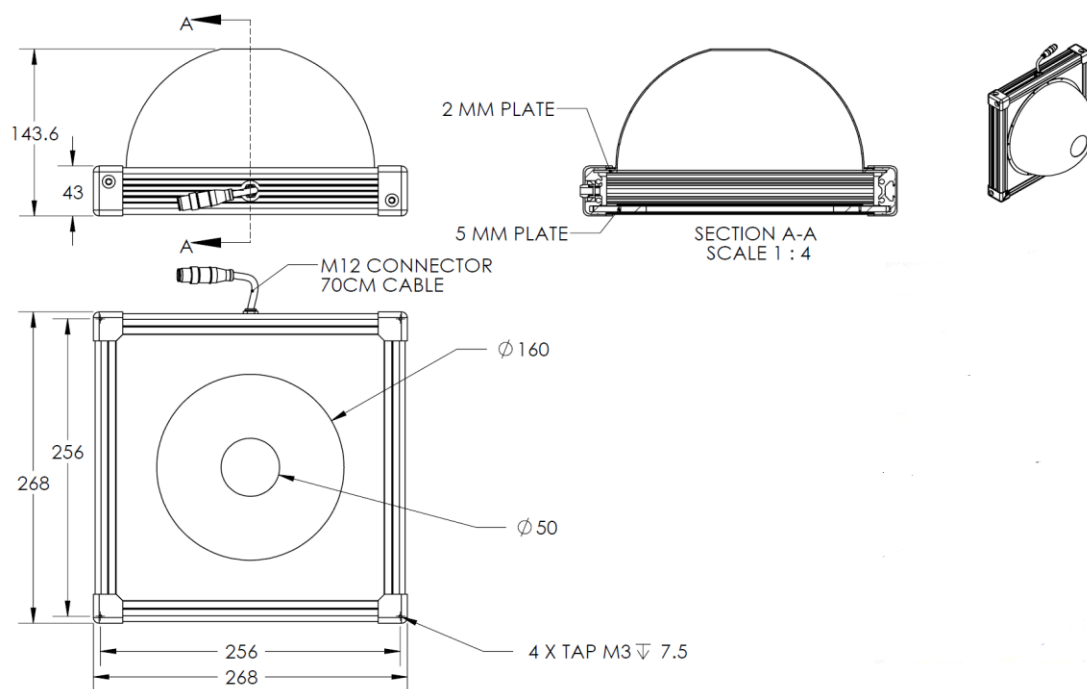


## HIDS-00-200-X-W-24V



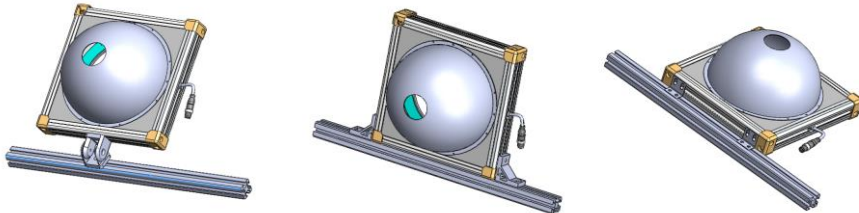
### Lighting Dimension



Mechanical Information	
Casing Material	Aluminium
Storage & Operating Temperature Range	Temp 0-60°C, Humidity 20-85%
Weight	2160 g
Outer Dimension	268 x 268 mm
Inner Diameter	50 mm
Thickness	143.6 mm



## HIDS-00-200-X-W-24V

Advantages	
Flexible Illuminator	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>Full Dome Cover</p>  </div> <div style="text-align: center;"> <p>Half Dome Cover</p>  </div> </div>
Easy Mounting	

Uniformity Graph (Relative Irradiation Strength) - Representative Pattern

LENS FOCAL LENGTH,  $F = 8 \text{ mm}$

CWD = 200 mm

LWD = 50 mm

COLOUR	TOLERANCE	L X W
Orange	$\pm 10 \%$	100 X 100
Yellow	$\pm 15 \%$	115 X 115
Green	$\pm 20 \%$	125 X 120
Blue	$\pm 25 \%$	135 X 120
Purple	$\pm 30 \%$	160 X 120

CWD = 250 mm

LWD = 100 mm

COLOUR	TOLERANCE	L X W
Orange	$\pm 10 \%$	75 X 78
Yellow	$\pm 15 \%$	99 X 100
Green	$\pm 20 \%$	120 X 120
Blue	$\pm 25 \%$	135 X 138
Purple	$\pm 30 \%$	200 X 150

\* Each individual box is 5 X 5 mm.

\*Disclaimer : The graphs portrayed are for reference only and does not in any way guarantee the quality of this product.