



## HIDQ-00-190-X-R-24V

### Lighting Dimension

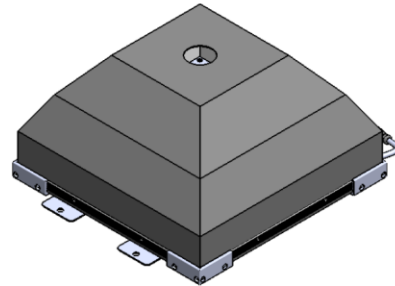


Mechanical Information	
Casing Material	Aluminium
Storage & Operating Temperature Range	Temp 0-60°C, Humidity 20-85%
Weight	2370 g
Outer Dimension	278 X 278 mm
Inner Diameter	35 mm
Thickness	156 mm

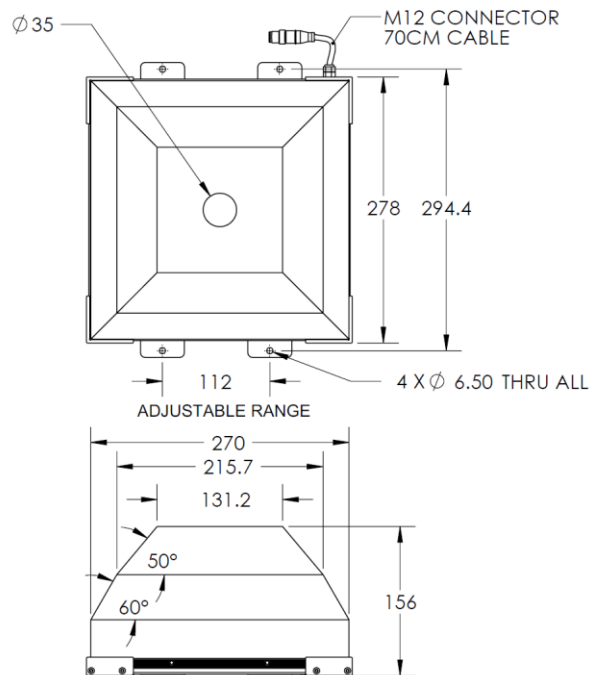

## HIDQ-00-190-X-R-24V

Optical Information				
Part Number		HIDQ-00-190-X-R-24V		
LED Colour		RED		
Wavelength	(nm)	630		
Intensity ( ±15%)	(Lux)	5184	4482	4280
Working Distance	(mm)	79	89	99
Illumination (number of rows)		2		
Illumination Active Area				
Active Outer Dimension	(mm)	200 X 200		
Active Inner Diameter	(mm)	35		
Emission Angle	(deg.)	0		
Eye Safety Class ( IEC62471)		EXEMPT		
Electrical Information				
Lighting Supply Voltage (constant voltage mode)		24V ± 2%		
Continuous Current	(mA)	1080		
Power Consumption	(W)	25.92		
Lighting Casing Temperature, Operating after 60 minutes	°C	49.5		
Strobe Mode Specification				
Pulse Operation		YES		
Max. Lighting Supply Voltage (constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle Recommended at 36VDC		
Pulse Current, (Max. 10 msec) (constant current power supply)	(mA)	3240		
Max. Trigger Pulse Duration	(msec)	10		
Duty Cycle		0-10%		
Additional Information				
Additional Cooling Method		Attached to machine part for better heat dissipation		
Lifespan in Continuous Mode		20,000 hours (drop to 50% intensity) at 25°C		
Lifespan in Strobe Mode		Est. >50,000 hours (drop to 50% intensity) at 25°C		
Intensity Controller Selection		SD/SDA-Series		
CE Conformity		YES		
RoHS Compliance		YES		
Connection				
Connector Type (default)		M12 5 PIN CONNECTOR (MALE)		
Cable Length (out from lighting)	( mm )	700		
Pin Configuration		Pin	Signal	Cable Colour
		1	24V	BROWN
		2	-	WHITE
		3	GND	BLUE
		4	-	BLACK
		5	-	GRAY
Extension Cable				
Connector Type (default)		M12 5 PIN CONNECTOR (FEMALE)		
Part Number		EXT-FL-M12F-3M-24V		
Cable Length (out from female connector)	(mm)	3000		
Extension Cable (connect to M12 5 Pin Male Connector from lighting)				
Application				
Illumination Type		Indirect Square Illumination		
Application Use		Crack, chip, stains and mark on edge of square or rectangular object		

## HIDQ-00-190-X-R-24V

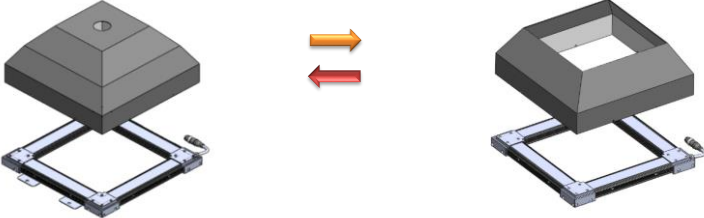Advantages	
Flexible Illuminator	<div data-bbox="635 342 820 360">Indirect Square Illumination</div> <div data-bbox="1086 342 1284 360">Square Dark Field Illumination</div> 
Easy Mounting	<div data-bbox="924 656 1007 674">Extend Plate</div> 