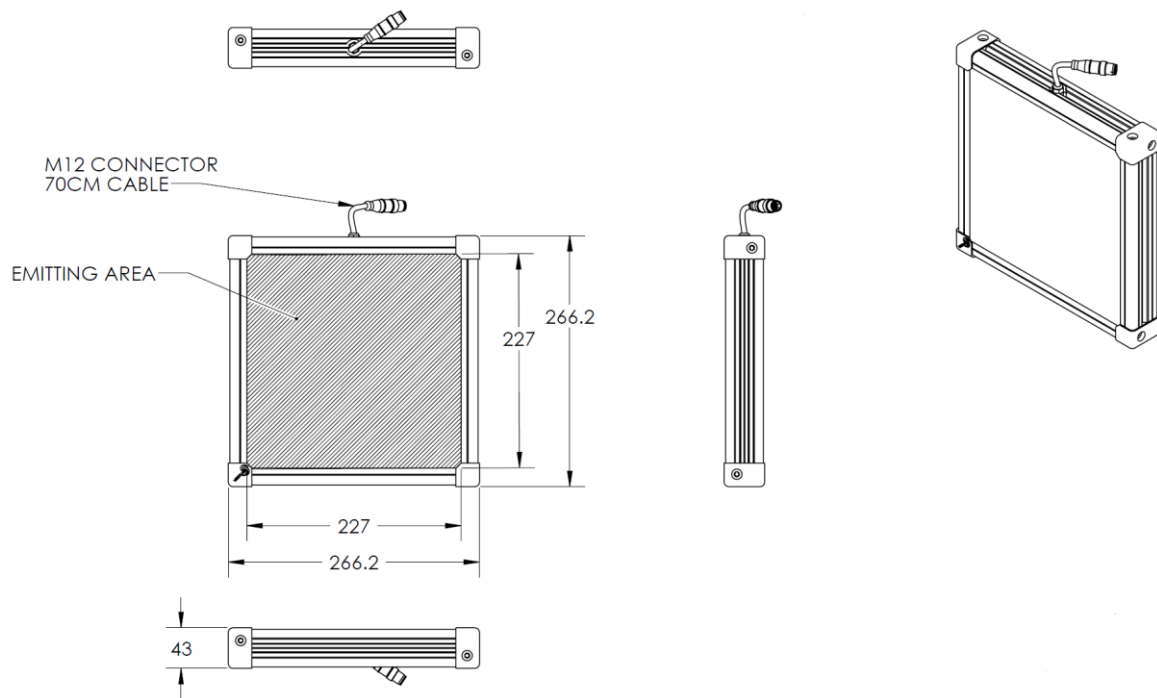


## HBBX-00-240X240-X-R-24V



### Lighting Dimension






Mechanical Information	
Casing Material	Aluminium
Storage & Operating Temperature Range	Temp 0-60°C, Humidity 20-85%
Weight	1900 g
Length / Outer Diameter	266.2 mm
Width / Inner Diameter	266.2 mm
Thickness	43 mm



## HBBX-00-240X240-X-R-24V

Optical Information				
Part Number		HBBX-00-240X240-X-R-24V		
LED Colour		RED		
Wavelength	(nm)	630		
Intensity ( ±15%)	(Lux)	8343	7965	7371
Working Distance	(mm)	10	20	30
Illumination (number of rows)		X		
Illumination Active Area				
Active Length	(mm)	227		
Active Width	(mm)	227		
Emission Angle	(deg.)	0		
Eye Safety Class ( IEC62471)		EXEMPT		
Electrical Information				
Lighting Supply Voltage (constant voltage mode)		24V ± 2%		
Continuous Current	(mA)	1080		
Power Consumption	(W)	25.92		
Lighting Casing Temperature, Operating after 60 minutes	°C	58.9		
Strobe Mode Specification				
Pulse Operation		YES		
Max. Lighting Supply Voltage (constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle Recommended at 36VDC		
Pulse Current, (Max. 10 msec) (constant current power supply)	(mA)	3240		
Max. Trigger Pulse Duration	(msec)	10		
Duty Cycle		0-10%		
Additional Information				
Additional Cooling Method		Attached to machine part for better heat dissipation		
Lifespan in Continuous Mode		20,000 hours (drop to 50% intensity) at 25°C		
Lifespan in Strobe Mode		Est. >50,000 hours (drop to 50% intensity) at 25°C		
Intensity Controller Selection		SD/SDA-Series		
CE Conformity		YES		
RoHS Compliance		YES		
Connection				
Connector Type (default)		M12 5 PIN CONNECTOR (MALE)		
Cable Length (out from lighting)	( mm )	700		
Pin Configuration		Pin	Signal	Cable Colour
		1	24V	BROWN
		2	-	WHITE
		3	GND	BLUE
		4	-	BLACK
		5	-	GRAY
				
Extension Cable				
Connector Type (default)		M12 5 PIN CONNECTOR (FEMALE)		
Part Number		EXT-FL-M12F-3M-24V		
Cable Length (out from female connector)	(mm)	3000		
Extension Cable (connect to M12 5 Pin Male Connector from lighting)				
Application				
Illumination Type		Backlight Illumination		
Application Use		Lead frame inspection, shape recognition, size measurement		

## HBBX-00-240X240-X-R-24V

Advantages			
PCBA Cascade			
Easy Mounting	<p>Join Bracket (Angle Mount)</p> 	<p>L Bracket (Vertical Mount)</p> 	<p>L-shaped Plate (Horizontal Mount)</p> 