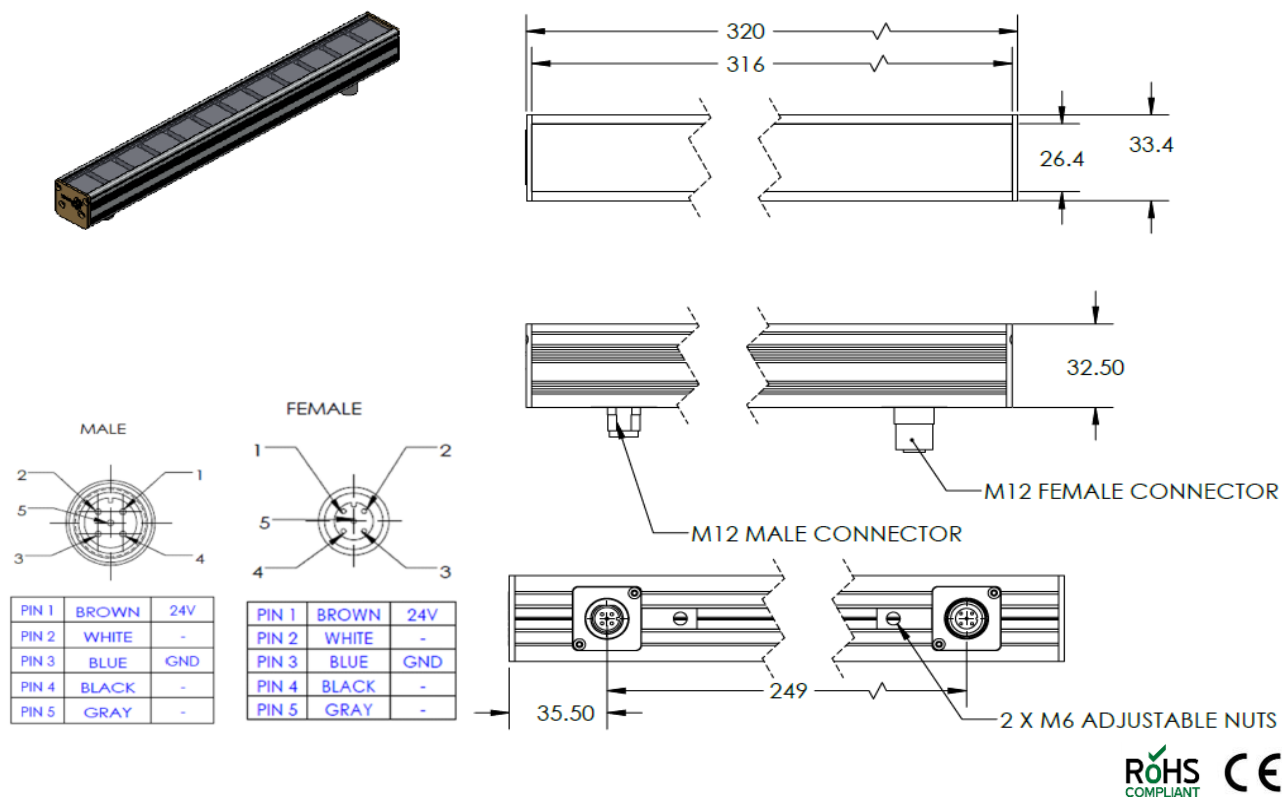


## HBL3-00-320-1-R-24V

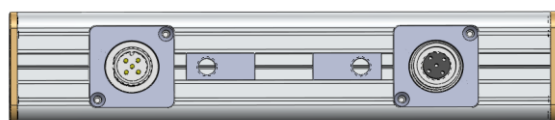

### Lighting Dimension






Mechanical Information	
Casing Material	Aluminium
Storage & Operating Temperature Range	Temp 0-60°C, Humidity 20-85%
Weight	500 g
Length / Outer Diameter	320 mm
Width / Inner Diameter	33.4 mm
Thickness / Height	32.5 mm



## HBL3-00-320-1-R-24V

Optical Information							
Part Number		HBL3-00-320-1-R-24V					
LED Colour		RED					
Wavelength	(nm)	630					
Intensity ( ±15%)	(Lux)	2412		1812			
Working Distance	(mm)	400		500			
Illumination (number of rows)		1					
Illumination Active Area							
Active Length / Outer Diameter	(mm)	316					
Active Width / Inner Diameter	(mm)	26.4					
Emission Angle	(deg.)	0					
Eye Safety Class ( IEC62471)		EXEMPT					
Electrical Information							
Lighting Supply Voltage (constant voltage mode)		24V ± 2%					
Continuous Current	(mA)	320					
Power Consumption	(W)	7.68					
Lighting Casing Temperature, Operating after 60 minutes	°C	42.1					
Strobe Mode Specification							
Pulse Operation		YES					
Max. Lighting Supply Voltage (constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle Recommended at 36VDC					
Pulse Current, (Max. 10 msec) (constant current power supply)	(mA)	960					
Max. Trigger Pulse Duration	(msec)	10					
Duty Cycle		0-10%					
Additional Information							
Additional Cooling Method		Attached to machine part for better heat dissipation					
Intensity Controller Selection		SD/SDA-Series					
CE Conformity		YES					
RoHS Compliance		YES					
Connection							
Connector Type (default)		M12 SPIN MALE CONNECTOR			M12 5 PIN FEMALE CONNECTOR		
Cable Length (out from lighting)	(mm)						
Pin Configuration		Pin	Colour	Signal	Pin	Colour	Signal
		1	Brown	24V	1	Brown	24V
		2	White	-	2	White	-
		3	Blue	GND	3	Blue	GND
		4	Black	-	4	Black	-
		5	Gray	-	5	Gray	-
							
Extension Cable							
Connector Type (default)		M12 5 PIN CONNECTOR (FEMALE)					
Part Number		EXT-FL-M12F-3M-24V					
Cable Length (out from female connector)	(mm)	3000					
Extension Cable (connect to M12 5 Pin Male Connector from lighting)							
Application							
Illumination Type		High Luminosity Line Bar Light					
Application Use		Robotic picking, inspection for parts identification & missing parts, visual inspection for large workpiece, measuring stamp dimensions for press products					

## HBL3-00-320-1-R-24V

Advantages	
Cascade Illuminator	 
Easy Mounting	<div>Join Bracket (Angle Mount)</div>  <div>L-shaped Plate (Horizontal Mount)</div> 