


## MLSW-30-130-6-W-24V

### Lighting Dimension



Mechanical Information	
Casing Material	Aluminium
Storage & Operating Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	332 g
Length / Outer Diameter	131.8 mm
Width / Inner Diameter	59.5 mm
Thickness / Height	24 mm

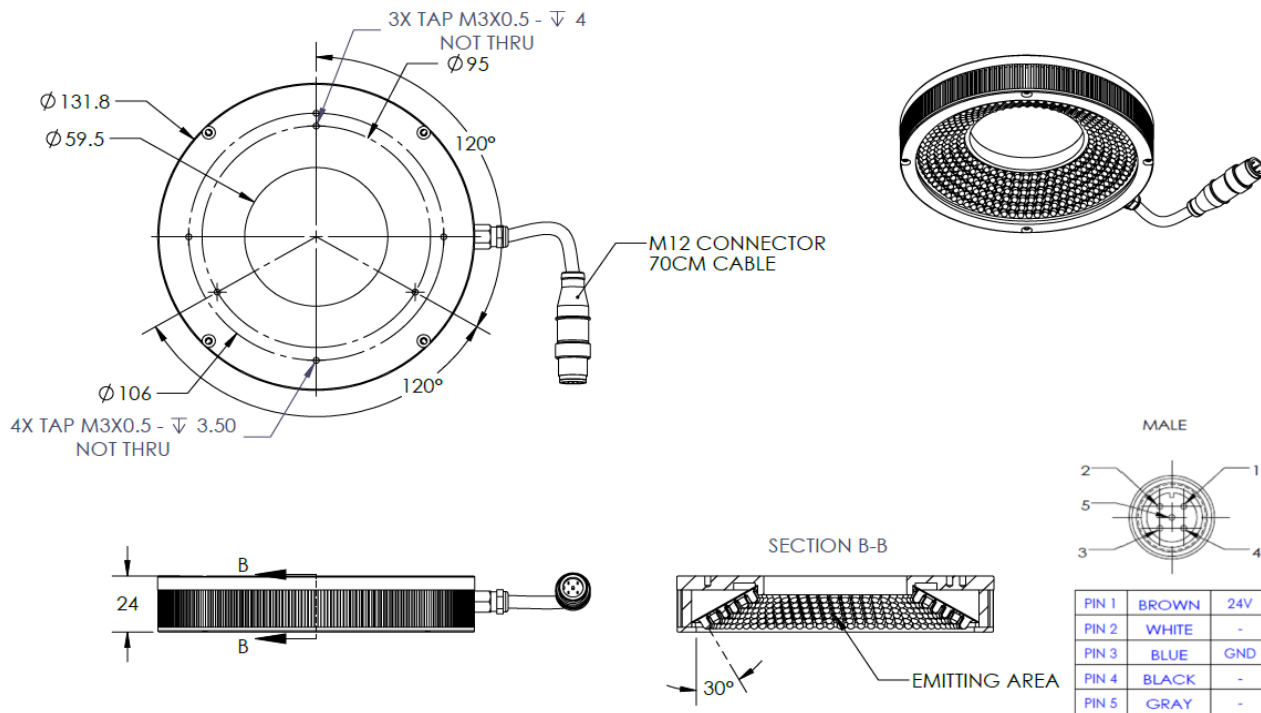

## MLSW-30-130-6-W-24V

Optical Information																															
Part Number		MLSW-30-130-6-W-24V																													
LED Colour		WHITE																													
Wavelength	(nm)	* Refer to the Chromaticity Table Below																													
Intensity ( ±15%)	(Lux)	TBA				TBA			TBA																						
Working Distance	(mm)	48				69			92																						
Illumination (number of rows)		6																													
Illumination Active Area																															
Active Length / Outer Diameter	(mm)	119.5																													
Active Width / Inner Diameter	(mm)	64.5																													
Emission Angle	(deg.)	30																													
Eye Safety Class ( IEC62471)		EXEMPT																													
*CHROMATICITY TABLE		<table><tr><td>X</td><td>0.296</td><td>0.287</td><td>0.307</td><td>0.311</td></tr><tr><td>Y</td><td>0.276</td><td>0.295</td><td>0.315</td><td>0.294</td></tr></table>					X	0.296	0.287	0.307	0.311	Y	0.276	0.295	0.315	0.294	<table><tr><td>X</td><td>0.311</td><td>0.307</td><td>0.33</td><td>0.33</td></tr><tr><td>Y</td><td>0.294</td><td>0.315</td><td>0.339</td><td>0.318</td></tr></table>					X	0.311	0.307	0.33	0.33	Y	0.294	0.315	0.339	0.318
X	0.296	0.287	0.307	0.311																											
Y	0.276	0.295	0.315	0.294																											
X	0.311	0.307	0.33	0.33																											
Y	0.294	0.315	0.339	0.318																											
Electrical Information																															
Lighting Supply Voltage (constant voltage mode)		24V ± 2%																													
Continuous Current	(mA)	756																													
Power Consumption	(W)	18.14																													
Lighting Casing Temperature, Operating after 60 minutes	°C	TBA																													
Strobe Mode Specification																															
Pulse Operation		YES																													
Max. Lighting Supply Voltage (constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC																													
Pulse Current, (Max. 10 msec) (constant current power supply)	(mA)	2268																													
Max. Trigger Pulse Duration	(msec)	10																													
Duty Cycle		0-10%																													
Additional Information																															
Additional Cooling Method		Attached to machine part for better heat dissipation																													
Intensity Controller Selection		SD and SDA Series																													
CE Conformity		YES																													
RoHS Compliance		YES																													
Connection																															
Connector Type (default)		M12 5 PIN CONNECTOR (MALE)																													
Cable Length (out from lighting)	( mm )	700																													
Pin Configuration		Pin	Signal			Cable Colour																									
		1	24V			BROWN																									
		2	-			WHITE																									
		3	GND			BLUE																									
		4	-			BLACK																									
		5	-			GRAY																									
Extension Cable																															
Connector Type (default)		M12 5 PIN CONNECTOR (FEMALE)																													
Part Number		EXT-FL-M12F-3M-24V																													
Cable Length (out from female connector)	(mm)	3000																													
Extension Cable (connect to M12 5 Pin Male Connector from lighting)																															
Application																															
Illumination Type		Direct Illumination																													
Application Use		Substrate inspection, label inspection, flat surface, fiducially recognition.																													